

Luminaires for circulation areas
Flat Railway fitting SX 509 031 150




Surface-mounted luminaire with EB for fluorescent lamps 1x T8/58 W

Wide-angle,
 Diffuser: prismatic profile, for vertical and horizontal applications,
 Body of extruded aluminium, End caps of die-cast aluminium, with diffuser of high impact resistant polycarbonate, provides cable trunking in 2 separate channels on the backside, cable to be inserted from front or back side,
 for wall ceiling and corner mounting,
 5-pole plug-in terminal block for 1- 2.5mm²,
 Colour: White RAL 9016
 B: 240mm, H: 70mm, L: 1590mm
 Weight: 8 kg

Manufacturer: SELUX
Typ: SX 509 031 150


for system components an accessories see extra sheet

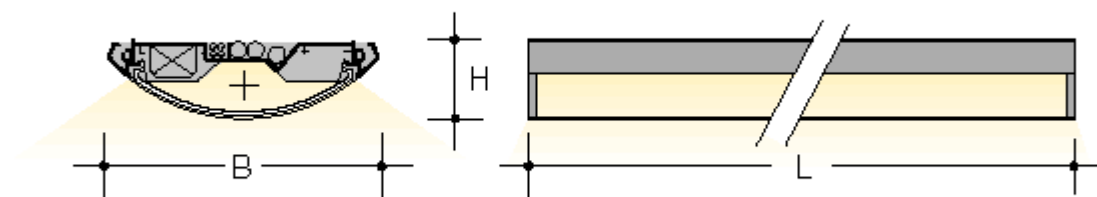

Length L: 1590mm
 Width B: 240mm
 Height H: 70mm

Photometric data:

1591-58

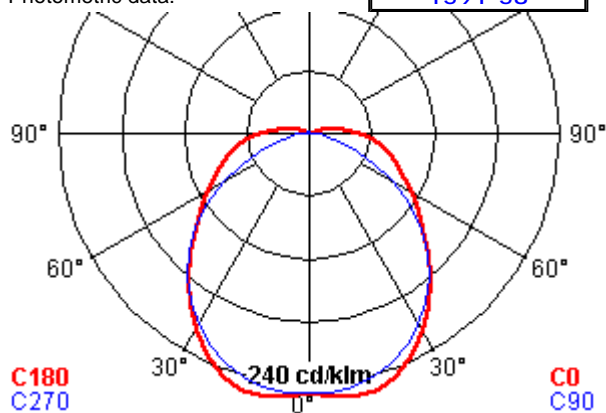

Lamp: 1 x T8/58 W (5200 lm)
 Electronic ballast
 Connected load: 55 W
 Light output ratio: 76,9 %
 Light distribution: Wide-angle,
 I max(10°) 250 cd/1000lm
 shielding: quality grade 2(500lx)
 UGR: < 19 (Parallel)/ < 22 (Vertical)

