

Wall fittings and free-standing luminaires

SILHOUETTE 260 SX 41951-978-1



Wall luminaire Part of the m-system with EB for fluorescent lamps T5

Indirect lighting,
Body of extruded aluminium, End caps of die-cast aluminium to be ordered separately,
Transparent acrylic glass profile,
Die-cast wall bracket,
5-pole terminal block up to 2.5mm², with 5-pole through-wiring 1.5mm²,

Colour: White RAL 9016


B: 300mm, H: 90mm

Weight: 7,2 kg/m

Manufacturer: SELUX

Typ: SX 41951-978-1


Set of end panels available SX 99-595-1

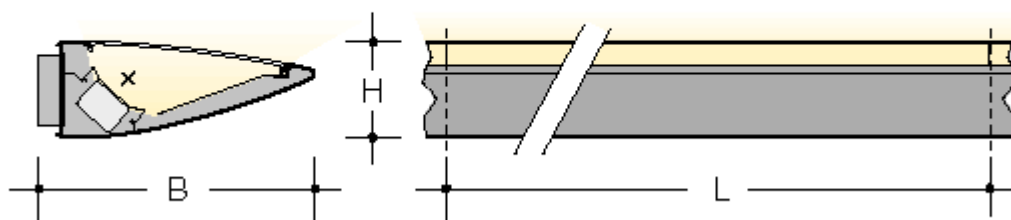

Power	data-block	Length of module (L)	Distance between suspension points (P)
39W	4858-39	880mm	Variable
54W	4858-54	1180mm	Variable
80W	4858-80	1480mm	Variable

Photometric data:

[4858-54](#)

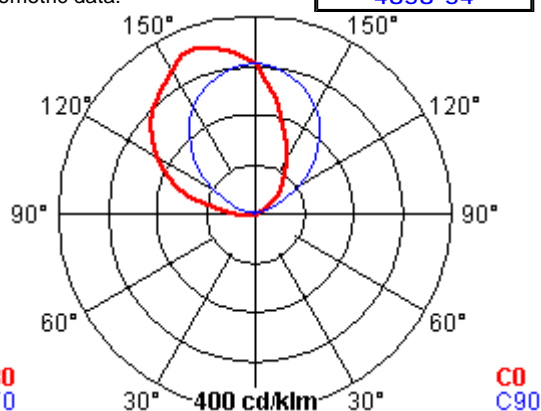

Lamp: 1 x T5/54 W (4450 lm)

Electronic ballast

Connected load: 61 W

Light output ratio: 80 %

suitable for workplaces with sensitive screens (according to

class III, ISO 9241-7); L<200cd/m" above 65° radially around

Light distribution: Indirect only, Oblique lighting,

I max(160°) 360 cd/1000lm

C180
C270

C0
C90

When ordering m-system components, please indicate order no. and lengths in mm



IP20

Subject to technical modification 08.2007 © SELUX

se'lux INTERIOR